



# TPS-3000

**Analog / digital teleprotection  
equipment ready for ETH links**

The distance protection device is the system located at the end of the power line and has the purpose of isolating faults on HV lines, transformers, reactances and other elements of the plant. It measures voltage, current, impedance and, in the event of a fault, it opens the breaker to avoid failures and damages to the electrical plant. In case of faults or anomalies on the power line, the distance protection devices communicate to the TPS-3000 the circuit-breaker trip signal to be sent to the remote teleprotection device, so that the remote distance protection intervenes to protect the power line. The reaction time is less than 100ms and within this interval the power line is completely disconnected and protected.

## MAIN INTEGRATED FUNCTIONALITIES

### BENEFITS

The **TPS-3000** device guarantees a high level of protection, stability and resilience of the power grid with real-time reactions to the events.

**TPS-3000** is an extremely flexible and cost effective power line protection solution. The set of functions and applications is complete and satisfies the needs of any type of scenario.

### MAIN FUNCTIONS AND FEATURES

Management of contact commands and commands according to IEC 61850;  
capacity: up to 8 contact commands (up to 16 commands with expansion subframe) and up to 8 GOOSE;

full configurability of command usage and priority;

management of independent or simultaneous commands;

high hardware modularity;

various digital/analog line interfaces (optical fiber, E1 2 Mbit/s G.703/G.704, co-directional 64 kbit/s G.703, 32/64/128 kbit/s V.11/X.21, analog and digital powerline carrier, 2/4 wire copper circuit, IEEE C37.94, IP/ethernet);

line interface redundancy;

support for transit commands for point-to-multipoint connections and T-line;

management of startup and out-of-service signalling;

redundancy of the power supply unit.

#### Alarm configurability;

- event recording in non-volatile memory with 1 ms resolution;
- command statistics;
- accurate alarm indications;
- remote configuration and monitoring, cybersecurity;
- access security (RADIUS, SSH, user profiling).

#### Terminal addressing for switched or routed networks;

- general diagnostic self-test;
- ethernet RJ45 interface for configuration and monitoring;
- GPS, IRIG-B, NTP and IEEE 1588 synchronization.

## OPERATING PRINCIPLES

### Digital Line Interfaces

The operating principle is based on guard signals decoding and on sending a certain number of de-coded commands using specific sequences of bits. When the TPS-3000 is idle, the guard signal is continuously transmitted to monitor the connection, check its quality and detect any interruptions. When a command is transmitted, the TPS-3000 sends the corresponding bits in a specific sequence.

- Multiplex channels with the digital user interface;
- radio channels with the digital user interface;
- fiber optic channels;
- multiplex channels with IEEE C37.94 interface;
- IP Packet Networks.

### Analog Line Interfaces

The TPS-3000 device uses shift modulation as its operating principle and is based on the Frequency Shift Keying (FSK) operating method. In idle mode, the guard tone is constantly transmitted, to allow connection monitoring in order to detect a drop or degradation in quality. If an event is transmitted, the guard tone is turned off and the FSK signal, corresponding to a particular command or set of commands, is transmitted. The command frequencies are sent at the maximum power made available by the transmission equipment.


- Analog powerline carrier;
- digital powerline carrier;
- dedicated telephone circuits 2/4 wires;
- multiplex channels with the analog user interface;
- radio channels with the analog user interface.

## SECURITY AND DEPENDABILITY (IEC 60834-1)

Both with digital (optical fiber, E1 G.703/G.704, V.11, IEEE C37.94, IP/ETH) and analog (analog/digital power line carrier, low frequency channels) interfaces, the device is able to guarantee high performances of security and reliability with the various protection schemes (intertripping, permissive underreach, permissive overreach and blocking). The transmission time, security and dependability are user-programmable for all analog and digital interfaces.

## PERFORMANCE

Nominal transmission time compliant with IEC 60834-1.

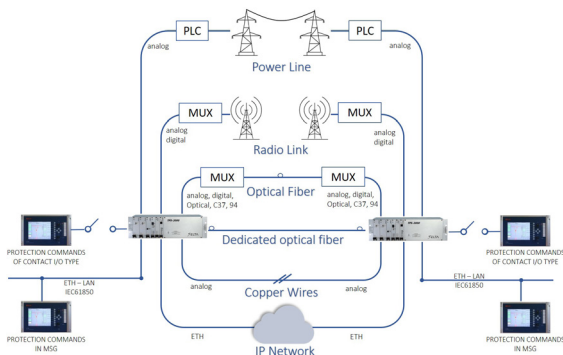

**POWER SUPPLY**

Number of units: 1 or 2 (redundancy)  
 Main power supply: 24/48 and 110/132 Vdc (-20% + +15%)  
 230 Vac [50Hz] (-20% + +15%)  
 220 Vdc  
 < 35 W (Vdc) < 50W (Vac)

**COMMAND INTERFACE**

Commands: contact  
 IEC 61850 protocol

**Contact Commands**

Number of commands: up to 8 (16 with expansion subrack)  
 Input number for interface: 2 (transmission controls and start)  
 Output number for interface: 3 (1 main output + 2 auxiliary)  
 Command input: optocoupler  
 Voltage range: 24/48/60/110/125/220 Vdc  
 Current range: Max. 20 mA  
 Command output: photo MOS relay  
 Contact type: normally open  
 Max. operating voltage: 230 Vac/250 Vdc  
 Max. current: 2A  
 Max. switchable power: 400 VA/500W

**IEC61850 protocol commands**

Electrical interface: RJ45, 100Base-TX, max. range 20m  
 Ports number: 1 or 2 (redundancy)  
 Security protocols: PRP o HSR  
 GOOSE max. number: 8  
 Optical interface: 1,310nm, LC connector, length 1.5 km

**ALARM INTERFACE**

**Electromechanical relays**

Contact type: SPDT (Single-Pole Double-Throw)  
 Max. operating voltage: 250 Vdc /200 Vac  
 Max. operating current: 2A  
 Switchable power: 400 VA

**Relè Photo MOS Relay**

Contact type: Photo MOS Relay NCO (Normally closed)  
 Max working voltage: 250 Vdc  
 Max current: 0.5A  
 Switchable power: 400 VA

**LINE INTERFACE**

**Line Unit in Short Reach F.O.**

Optical fiber (short distance)  
 Transmission support: single-mode (10/125 µm)  
 Wavelength: 1310 nm  
 Max. distance: 15 km  
 Optical connectors: SFP LC

**Line Unit in Intermediate Reach F.O.**

Optical fiber (intermediate distance)  
 Transmission support: single-mode (10/125 µm)  
 Wavelength: 1310 nm  
 Max. distance: 40 km  
 Optical connectors: SFP LC

**Line Unit in Long Reach F.O.**

Optical fiber (long distance)  
 Transmission support: single-mode (10/125 µm)  
 Wavelength: 1550 nm  
 Max. distance: 80 km  
 Optical connectors: SFP LC

**Line Unit in Extra-Long Reach F.O.**

Optical fiber (extra-long distance)  
 Transmission support: single-mode (10/125 µm)  
 Wavelength: 1550 nm  
 Max. distance: 120 km  
 Optical connectors: SFP LC

**ITU-T- G.703/G.704 2Mbit/s Line Unit**

Data rate: 2 Mbit/s  
 Line code: HDB3/AM  
 Impedance: 120 Ω balanced/75 Ω unbalanced

**ITU-T - G.703 Line Unit**

G.703 co/counter-directional  
 Data rate: 64 Kbit/s  
 Line code: HDB3/AMI  
 Impedance: 120 Ω balanced

**ITU-T-V11 Line Unit**

128 kb/s /64/32 kb/s V.11/X.24  
 Data rate: 64/32/128 Kbit/s  
 Impedance: 100 Ω balanced/high impedance

**IEEE C37.94 Line Unit**

Optic fiber (up to 2 Km)  
 Transmission support: multi-mode (50/125 o 62.5/125 µm)  
 Wavelength: 820 nm  
 Data rate: Nx64 Kbit/s (N=1...12)

**Ethernet Line Unit**

IP/Ethernet Interface: two port types  
 10/100 B-TX (RJ45) and 100 B-FX (via SFP)  
 Fast Ethernet SFP Module  
 Transmission support: multi-mode (50/125 or 62,5/125 µm)  
 Wavelength: 1310 nm  
 Max distance: 2 km  
 Optical Connectors: SFP LC

**Low Frequency Line Unit**

Type: 2/4 wires  
 Band: 0 ÷ 4 kHz  
 Impedance:M 600 Ω balanced/unbalanced  
 Nominal level of guard: -10 dBm  
 Nominal command level: 0 dBm  
 Range TX: 0 ÷ -25 dBm (step 1 dBm)  
 Dynamic range RX: 25 dB

**Low Frequency Line Unit for powerline carriers**

Type: 4 wires  
 Band TX: 0 ÷ 4 kHz  
 Band RX: 12 ÷ 16 kHz  
 Impedance: 600 Ω unbalanced  
 Nominal level of guard: -33 dBm  
 Nominal guard level in carrier boost mode: -15 dBm

Nominal command level: -15 dBm  
 Standard: Enel CC5002

**Plastic Optical Fiber Line Unit for powerline carriers**

Transmission support: plastic optical fiber (1mm)  
 Wavelength: 650 nm  
 Guaranteed attenuation: 12 dB

**Optical connectors: snap-on duplex**

**SUPERVISION AND PROGRAMMING INTERFACE**

TX/RX: 10/100/1000 Mbit/s  
 Electrical interface: Ethernet 10/100/1000 Base-T

**ENVIRONMENTAL CONDITIONS**

Operating temperature: -20 ÷ +60 °C  
 Storage and transport temperature: -40 ÷ +70 °C  
 Relative humidity: ≤ 93% ÷ 40 °C

**STANDARD**

EMC Directive 2014/30/UE – IEC 60834-1, EN IEC 61000-6-2, EN IEC 61000-6-4, EN IEC 61000-6-5, IEC 60870-2-1 CEI - EN 60255-26, EN 55032  
 Teleprotection Command Systems EN/IEC - EN/IEC 61000-6-4, EN 55022 class A (emissions), EN/IEC 61000-6-2 (immunity)  
 Low voltage directive 2014/35/UE (LVD and Safety), EN IEC 62368-1 (Safety)

**MECHANICAL CHARACTERISTICS**

Dimensions: 482,52x253x132,5 mm (3 SU)  
 Weight: <8 kg

**APPROVAL CERTIFICATIONS:**

**EMC**

- IEC 61850-3
- CEI EN 61000-6-5
- IIC 60255-26
- EN 60870-2-1
- CEI EN IEC 61000-6-2
- CEI EN IEC 61000-6-4
- CEI EN 60068-2-1
- CEI EN 60068-2-2
- CEI EN 60068-2-78
- CEI EN 60068-2-30
- CEI EN 60068-2-14

**Mechanical compatibility**

**Electric Safety**

- IEC 60255-21-1
- IEC 60255-21-2
- IEC 60255-21-3
- CEI EN 60068-2-6
- CEI EN 60068-2-27.

**Climate Compatibility**

- IEC 61850-3
- IIC 60255-26
- EN 60870-2-1



**DigitalPlatforms Spa Offices**

29010 Cadeo (PC), Italy, Via Emilia 231 - ph. +39 0523.50161 – fax. +39 0523.5016333  
 64018 Tortoreto (TE), Italy, Via Nazionale km 404,500 - ph. +39 0861.772511 – fax. +39 0861.772555  
 00155 Roma (RM), Italy, Via Andrea Noale 351 - ph. +39 062291879 – fax. +39 0622709440

[www.selta.com](http://www.selta.com)  
[marketing@selta.com](mailto:marketing@selta.com)  
[sales.et@selta.com](mailto:sales.et@selta.com)